

For reliable measurement, control and indication of rotational speeds



## RT STROBE 7000 LED

Outstanding light intensity  
with intelligent LED-technology  
for XXL-web widths

Low-wear technology  
with LEDs

light intensity and image  
sharpness adjustable

Homogeneous and large  
area illumination

Applicable for web width  
exceeding 500 mm



9.000  
LUX



## High-performance stationary LED-stroboscope with powerful light output and homogenous illumination for XXL-web widths

**High light output** Due to the configuration with 200 high-performance LEDs, the *RT STROBE 7000 LED* offers a powerful light intensity. The large, homogeneous illumination surface delivers superb results even at difficult light conditions, making the *RT STROBE 7000 LED* suitable for a very wide range of measurement, observation and inspection functions. It is especially suitable for demanding applications, such as those in the printing industry.

**High focus** With an adjustable flash duration from 1–1000 µseconds, you will easily find the best combination between light intensity and sharp images for every application.

**Flexible adjustment to all applications** Alternatively, the stroboscope can be controlled directly by the trigger signal of your system without the need for additional control units or by various *RT STROBE* control devices. When using these trigger options simultaneously, you can easily alternate between the signal inputs by using the switch on the reverse side of the device.

**Additional control options** The *RT STROBE control* model range includes two devices for varying the control of the *RT STROBE 7000 LED*:

*RT STROBE eco control* – a simple and inexpensive unit for controlling flash frequency. You simply insert this small control unit into one of the sockets on the reverse side of the device.

*RT STROBE control* – for adjusting the flash frequency, phase shift, delay time and trigger divider. This unit is connected to the stroboscope by cable and provides the convenience of remote control even if the stroboscope within your machine is difficult to access.



## Technical data

### General parameters

Frequency range	0...120,000 FPM (flashes per minute)
Power supply	24 VDC (+/-10%) / 40 W
	DIN 41524 5-pin standard plug
	universal power supply unit available
External trigger input	3...30 V / max. 5 mA
	potential-free optocoupler
	DIN 41524 5-pin standard plug
	U <sub>out</sub> = U <sub>in</sub> , max. 200 mA
	switchable trigger input
Trigger output	for parallel connection

### Flash parameters

Light intensity/sharpness	adjustable with tuning knob
Light intensity single flash	approx. 1,2 Mega-Lux / 30cm / 12"
Light intensity	9,000 Lux / 30 cm / 12"
Illumination area	30 x >50 cm / 12 x >20"
Flash colour	approx. 5,000...8,300 K

### Housing

Material	Aluminium
Dimensions	440x130x112 mm / 17,3x5,1x4,4"
Weight	2,100 g

### Ambient conditions

Ambient temperature	0°...40°C (32°...104°F)
Storage temperature	-25°C...70°C (-13...158°F)
Humidity	max. 95% not condensing

### Certifications

Certificate of CE conformity

### Scope of delivery


A6-7200: *RT STROBE 7000 LED* stroboscope, operating instructions, 1 plug for connection of trigger input and/or power.

A6-7210: *RT STROBE 7000 LED* stroboscope, power supply unit, operating instructions, 1 plug for connection of trigger input and/or power.

### Accessories (optional)

Tripod/wall mounting, power supply unit, plug for trigger signal/supply connection, Stroboscope control units: *RT STROBE control* or *RT STROBE eco control*.

### Illumination level

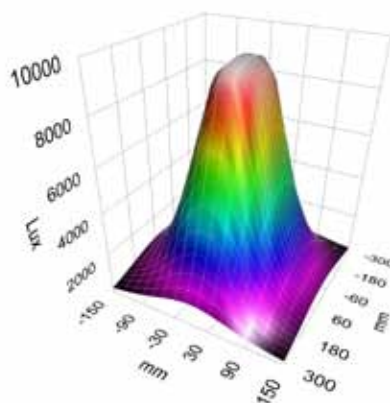

## RHEINTACHO Messtechnik GmbH

Waltershofener Straße 1  
79111 Freiburg · Germany  
Telefon +49 (0)761 45 13 0  
Telefax +49 (0)761 44 52 74  
info@rheintacho.de  
www.rheintacho.de

N0002.065